

# CPC-2365

## PCI bus Transmeta Mini Biscuit PC with LAN

Transmeta

Ethernet

Audio

SSD


Coming Soon

Smallest and Powerful CardSize PC

### Features:

- Transmeta TM5400 on board (533MHz)
- 64MB SDRAM on board (128MB Max.)
- CompactFlash™
- USB & AC97
- 10/100 Mbps Ethernet
- Two RS-232, IDE, LPT, FDD
- Watchdog timer

FCC CE

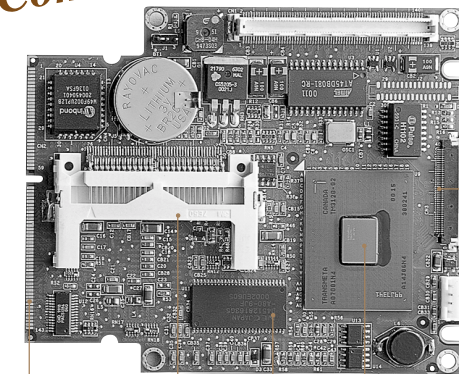

FPC connector:  
Ethernet  
COM1  
COM2  
KB/Mouse  
USB  
AC97

144-pin SODIMM:  
PCI bus  
IDE/FDD/LPT  
HDD/LAN LED  
+5V

CompactFlash  
socket

64 MB SDRAM

CPU

### System

• CPU	Transmeta TM5400 (533 MHz)
• System Memory	64MB DRAM on-board (up to 128MB)
• BIOS	Award 2 Mbit Flash BIOS
• SSD	Supports CompactFlash™ Card
• Watchdog Timer	1.6 second interval
• Extending BUS I/F	144-pin SODIMM socket provides PCI
• Battery	Lithium
• Power Consumption	Typical 5 V @ 1 A Max. 5 V @ 2 A
• Size/Weight	97x100 mm (3.4"x3.9"), 0.05Kg (0.11lb)
• Temperature	0 ~ 60° C (32 ~ 140° F), operation
• Operating Humidity	0% ~ 90% Relative Humidity, non-condensing

### I/O Ports

• MIO	1xEIDE, 1xFDD, 1x K/B, 1x mouse, 2x RS-232, 1x LPT
• USB	2 USB ports, compliant
• IrDA	9600bps Serial infrared(SIR) port
• Ethernet Interface	Realtek RTL8139, PCI bus 10/100Mbps Base-T Ethernet
• Audio	AC 97

### Packing List

- Power cable Micro-4P to Big 4P 1702040050
- Stand-off M3\*4 mm 193A130440
- Utility CD

### Ordering information

#### Standard

- CPC-2365-6400 PCI bus Transmeta Mini Biscuit PC with Crusoe/LAN

#### Optional

- CPC-2602-0000 PCI bus Mini Biscuit PC development board with Audio/USB (March/2001 available)
- CPC-2600-0000 PCI bus Mini Biscuit PC development board